




CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : **CTW-TIE AND GROUND WIRE**

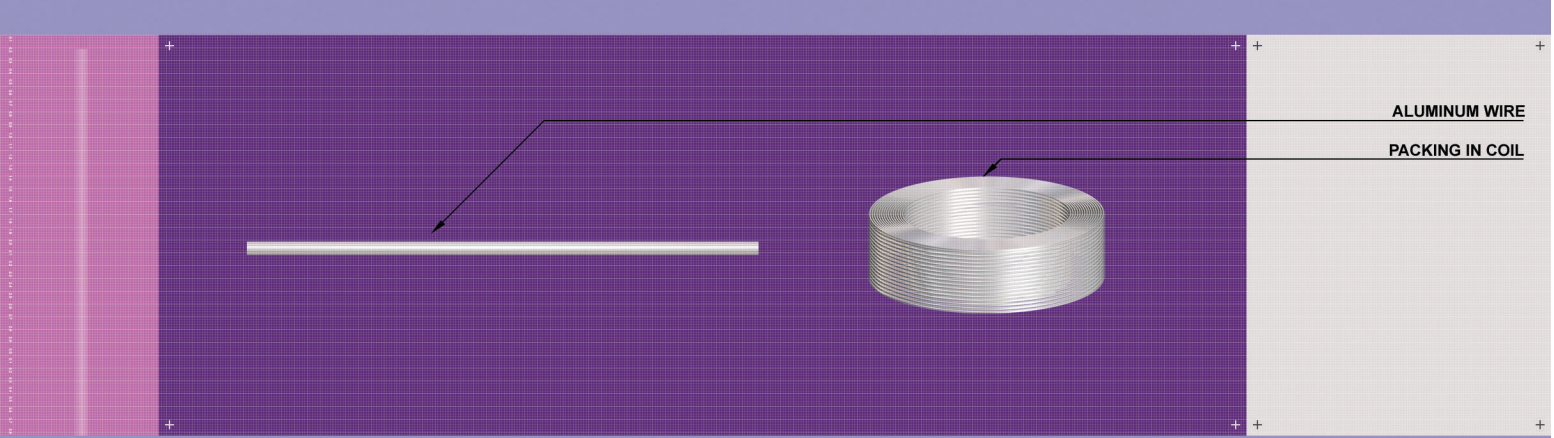

| CONSTRUCTION | APPLICATION | REFERENCE |
|----------------------------------|---|--|
| Solid, soft 1350-O aluminum wire | Generally used in overhead transmission and distribution line construction to mechanically secure components such as conductor to pin insulation. Also used for grounding applications in line construction | * ASTM B-609 (Soft aluminum wire, 1350-0) |

| Product Code | Size | Diameter | Weight | Breaking strength | Packing |
|--------------|------|---------------|-----------------------|-------------------|---------|
| | AWG | mils(mm.) | lb./1000ft (kg/km) | lbs. (kgf) | kg |
| A10710006** | 6 | 162 (4.115) | 24.12 (36) | 232 (105) | 25/C |
| A10710004** | 4 | 204.3 (5.189) | 38.35 (57) | 369 (167) | 25/C |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

C = Packing in coil
R = Packing in reel