


**CABLE TYPE : CTW 60227 IEC 43**

300/300 V 70°C PVC DOUBLE INSULATED, FLEXIBLE SINGLE CORE

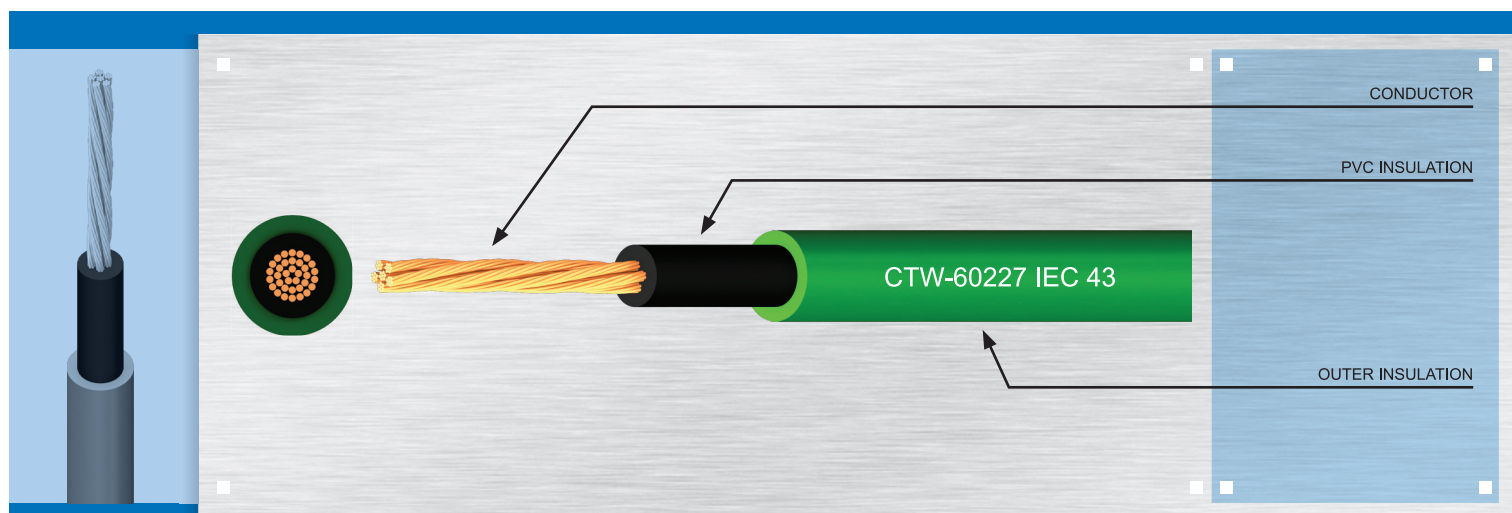

## CONSTRUCTION

|                         |                                                                     |
|-------------------------|---------------------------------------------------------------------|
| <b>Conductor</b>        | Anneal copper, bunch stranded<br>Sizes 0.5 sq.mm. up to 0.75 sq.mm. |
| <b>Inner Insulation</b> | Polyvinyl chloride (PVC/D)<br>Colour : Black                        |
| <b>Outer Insulation</b> | Polyvinyl chloride (PVC/D)<br>Colour : Green                        |

## APPLICATION

Using for decorative lights in building.

## CLASSIFICATION

Maximum conductor temperature 70°C  
Circuit voltage does not exceed 300 volts.

## REFERENCE

 TIS 11-2553 Part 5 Table 3  
IEC 60227 Part 5 Table 3  
AC Test Voltage : 2.0 kV

## NOTE

[illegible]