


**CABLE TYPE : CTW-60227 IEC 53**

300/500 V 70°C PVC INSULATED AND SHEATHED, FLAT TYPE, FLEXIBLE TWO CORES

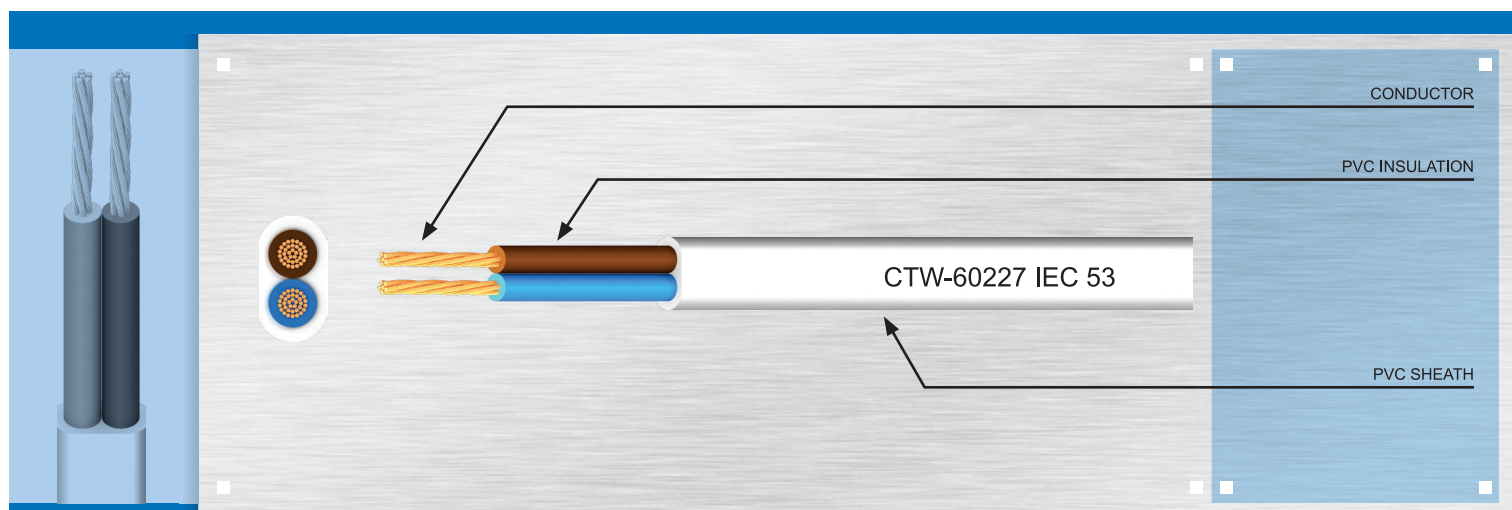

## CONSTRUCTION

|                   |                                                                     |
|-------------------|---------------------------------------------------------------------|
| <b>Conductor</b>  | Anneal copper, bunch stranded<br>Sizes 0.75 sq.mm. up to 2.5 sq.mm. |
| <b>Insulation</b> | Polyvinyl chloride (PVC/D)<br>Colour : Blue, Brown                  |
| <b>Sheath</b>     | Polyvinyl chloride (PVC/ST5)<br>Colour : White                      |

## APPLICATION

Using for electrical home apparatus  
(Heavy duty), down light etc

## CLASSIFICATION

Maximum conductor temperature 70°C  
Circuit voltage does not exceed 500 volts.

## REFERENCE


 TIS 11-2553 Part 5 Table 9  
IEC 60227 Part 5 Table 9  
AC Test Voltage : 2.0 kV

## NOTE

[illegible]

**CABLE TYPE : CTW 60227 IEC 53**

300/500 V 70°C PVC INSULATED AND SHEATHED, FLEXIBLE TWO CORE

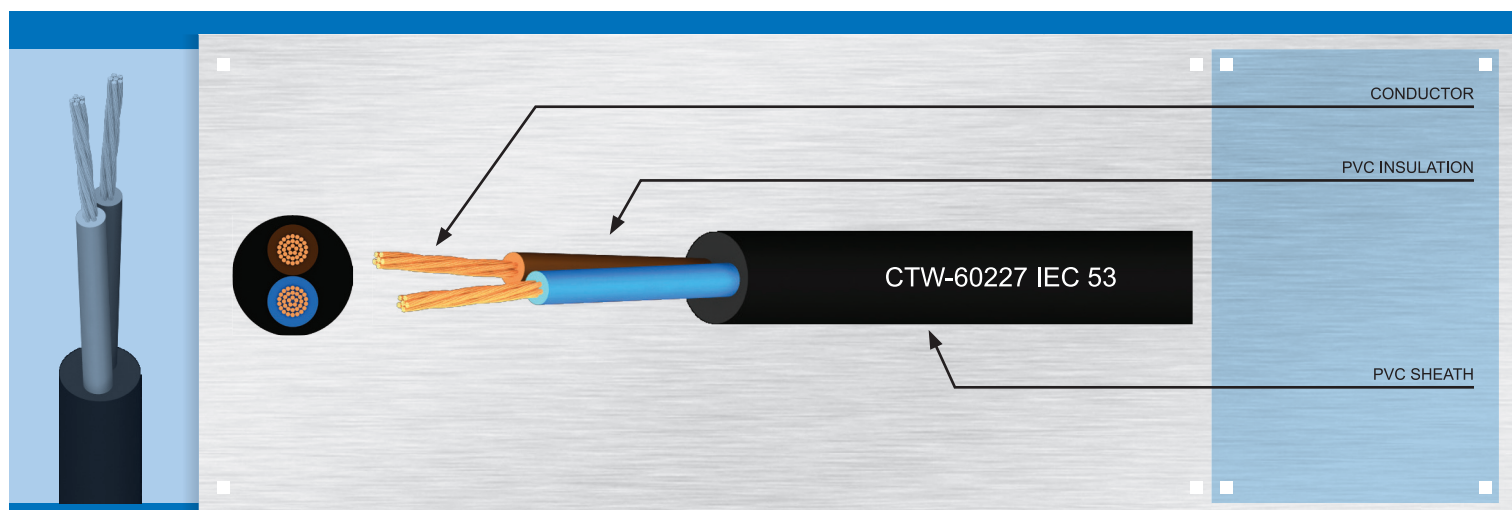

## CONSTRUCTION

|                   |                                                                     |
|-------------------|---------------------------------------------------------------------|
| <b>Conductor</b>  | Anneal copper, bunch stranded<br>Sizes 0.75 sq.mm. up to 2.5 sq.mm. |
| <b>Insulation</b> | Polyvinyl chloride (PVC/D)<br>Colour : Blue, Brown                  |
| <b>Sheath</b>     | Polyvinyl chloride (PVC/ST5)<br>Colour : Black                      |

## APPLICATION

Using for electrical home apparatus  
(Heavy duty), down light etc.

## CLASSIFICATION

Maximum conductor temperature 70°C  
Circuit voltage does not exceed 500 volts.

## REFERENCE


 TIS 11-2553 Part 5 Table 9  
IEC 60227 Part 5 Table 9  
AC Test Voltage : 2.0 kV

## NOTE

[illegible]

**CABLE TYPE : CTW-60227 IEC 53**

300/500 V 70°C PVC INSULATED AND SHEATHED, FLEXIBLE THREE CORES

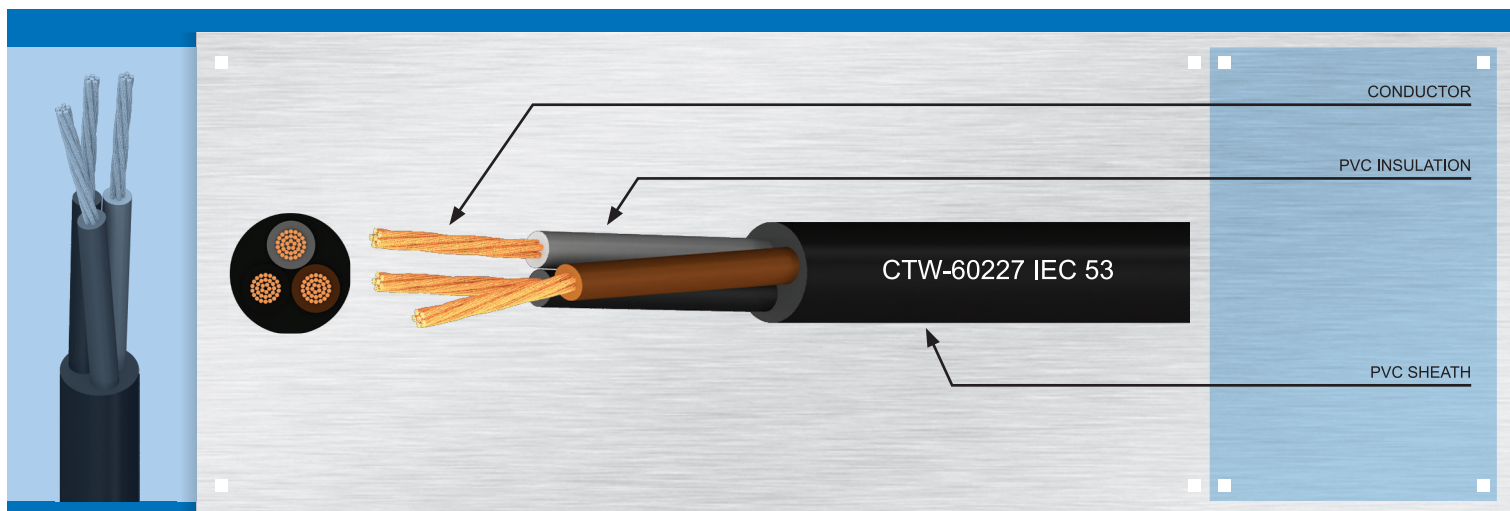

## CONSTRUCTION

|                   |                                                                     |
|-------------------|---------------------------------------------------------------------|
| <b>Conductor</b>  | Anneal copper, bunch stranded<br>Sizes 0.75 sq.mm. up to 2.5 sq.mm. |
| <b>Insulation</b> | Polyvinyl chloride (PVC/D)<br>Colour : Brown, Black, Grey           |
| <b>Sheath</b>     | Polyvinyl chloride (PVC/ST5)<br>Colour : Black                      |

## APPLICATION

Using for electrical home apparatus  
(Heavy duty), down light etc.

## CLASSIFICATION

Maximum conductor temperature 70°C  
Circuit voltage does not exceed 500 volts.

## REFERENCE

 TIS 11-2553 Part 5 Table 9  
IEC 60227 Part 5 Table 9  
AC Test Voltage : 2.0 kV


## NOTE

**\*\* Product code “CGP036XXX” for colour : Blue, Brown, Green with Yellow stripe \*\***

[illegible]

**CABLE TYPE : CTW-60227 IEC 53**

300/500 V 70°C PVC INSULATED AND SHEATHED, FLEXIBLE FOUR CORES

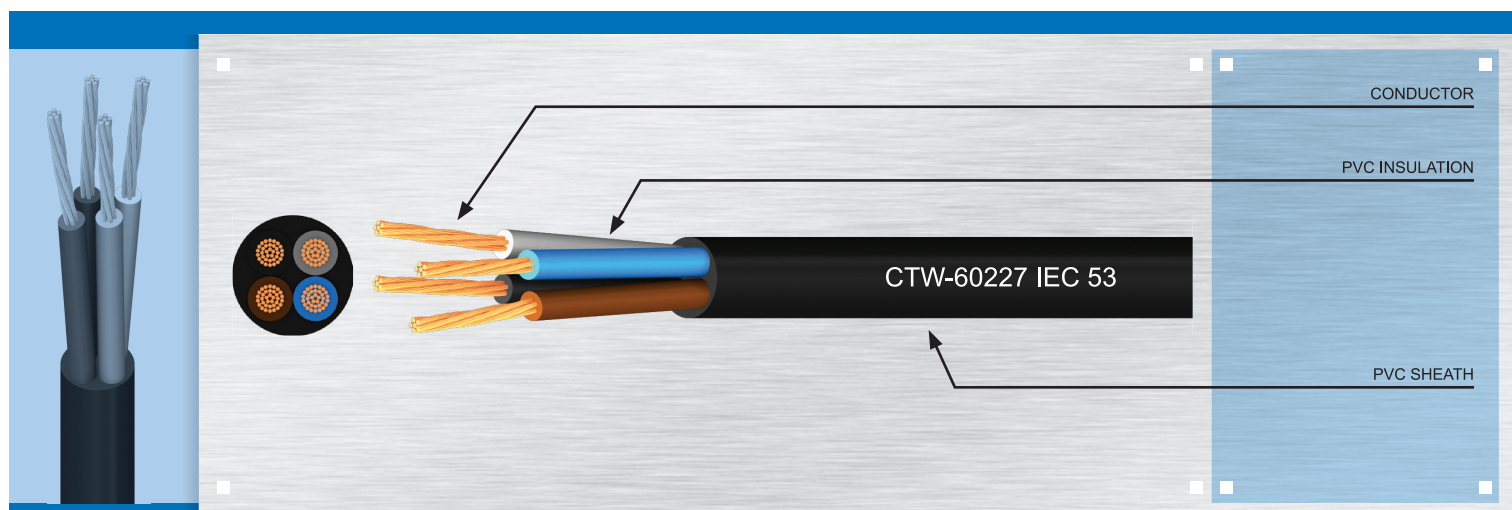

## CONSTRUCTION

|                   |                                                                     |
|-------------------|---------------------------------------------------------------------|
| <b>Conductor</b>  | Anneal copper, bunch stranded<br>Sizes 0.75 sq.mm. up to 2.5 sq.mm. |
| <b>Insulation</b> | Polyvinyl chloride (PVC/D)<br>Colour : Blue, Brown, Black, Grey     |
| <b>Sheath</b>     | Polyvinyl chloride (PVC/ST5)<br>Colour : Black                      |

## APPLICATION

Using for electrical home apparatus  
(Heavy duty), down light etc.

## CLASSIFICATION

Maximum conductor temperature 70°C  
Circuit voltage does not exceed 500 volts.

## REFERENCE

 TIS 11-2553 Part 5 Table 9  
IEC 60227 Part 5 Table 9  
AC Test Voltage : 2.0 kV


## NOTE

**\*\* Product code "CGP036XXX" for colour :  
Blue, Brown, Black, Green with Yellow stripe \*\***

[illegible]

**CABLE TYPE : CTW-60227 IEC 53**

300/500 V 70°C PVC INSULATED AND SHEATHED, FLEXIBLE FIVE CORES

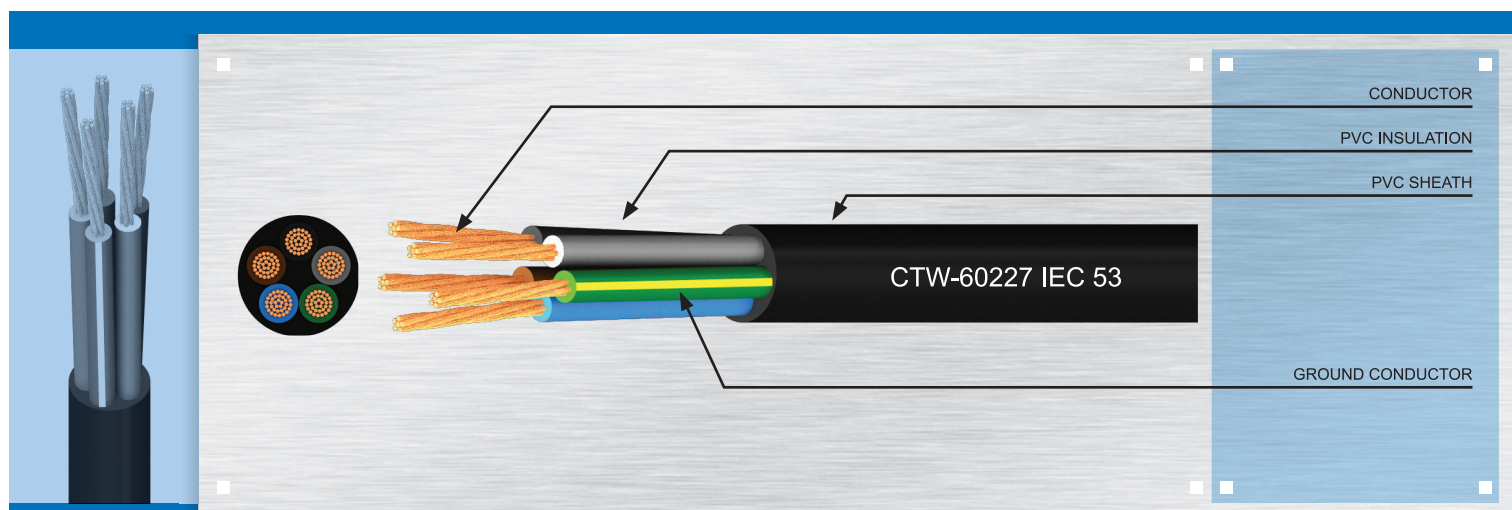

## CONSTRUCTION

|                   |                                                                                              |
|-------------------|----------------------------------------------------------------------------------------------|
| <b>Conductor</b>  | Anneal copper, bunch stranded<br>Sizes 0.75 sq.mm. up to 2.5 sq.mm.                          |
| <b>Insulation</b> | Polyvinyl chloride (PVC/D)<br>Colour : Bule, Brown, Black, Grey,<br>Green with Yellow stripe |
| <b>Sheath</b>     | Polyvinyl chloride (PVC/ST5)<br>Colour : Black                                               |

## APPLICATION

Using for electrical home apparatus  
(Heavy duty), down light etc.

## CLASSIFICATION

Maximum conductor temperature 70°C  
Circuit voltage does not exceed 500 volts.

## REFERENCE


 TIS 11-2553 Part 5 Table 9  
 IEC 60227 Part 5 Table 9  
 AC Test Voltage : 2.0 kV

## NOTE

[illegible]