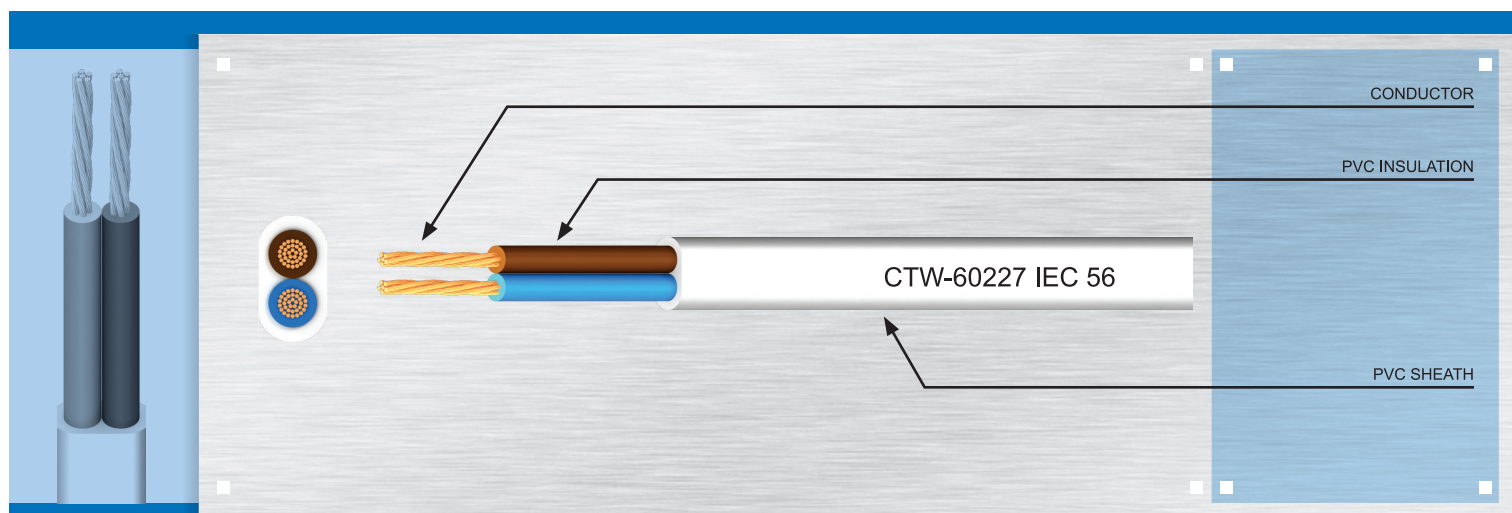


CABLE TYPE : CTW 60227 IEC 56

300/300 V 90°C PVC INSULATED AND SHEATHED, FLAT TYPE, FLEXIBLE TWO CORES



CONSTRUCTION

Conductor	Anneal copper, bunch stranded Sizes 0.5 sq.mm. up to 0.75 sq.mm.
Insulation	Polyvinyl chloride (PVC/E) Colour : Blue, Brown
Sheath	Polyvinyl chloride (PVC/ST10) Colour : White

APPLICATION

Using for electrical home apparatus.
(Heavy duty)

CLASSIFICATION

Maximum conductor temperature 90°C
Circuit voltage does not exceed 300 volts.

REFERENCE

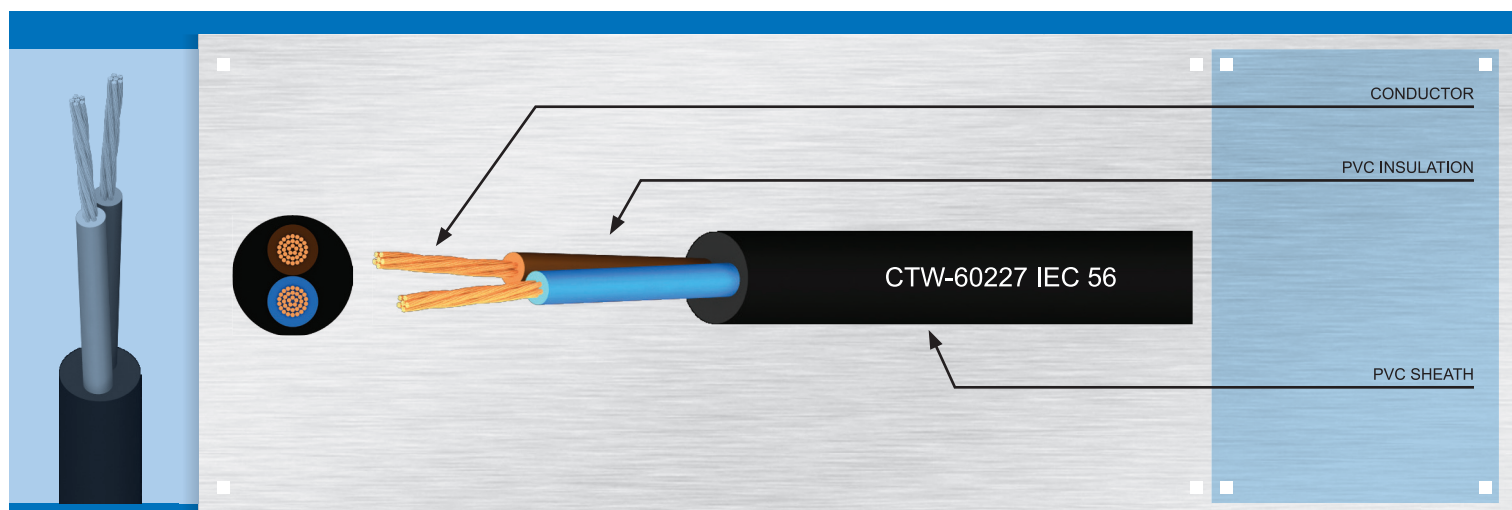

 TIS 11-2553 Part 5 Table 11
 IEC 60227 Part 5 Table 11
 AC Test Voltage : 2.0 kV

NOTE

[illegible]

CABLE TYPE : CTW-60227 IEC 56

300/300 V 90°C PVC INSULATED AND SHEATHED, FLEXIBLE TWO CORES



CONSTRUCTION

Conductor	Anneal copper, bunch stranded Sizes 0.5 sq.mm. up to 0.75 sq.mm.
Insulation	Polyvinyl chloride (PVC/E) Colour : Blue, Brown
Sheath	Polyvinyl chloride (PVC/ST10) Colour : Black

APPLICATION

Using for electrical home apparatus.
(Heavy duty)

CLASSIFICATION

Maximum conductor temperature 90°C
Circuit voltage does not exceed 300 volts.

REFERENCE

 TIS 11-2553 Part 5 Table 11
IEC 60227 Part 5 Table 11
AC Test Voltage : 2.0 kV

NOTE

[illegible]

