




300/500 V 70°C PVC INSULATED AND SHEATHED, FLAT TYPE, TWO CORES

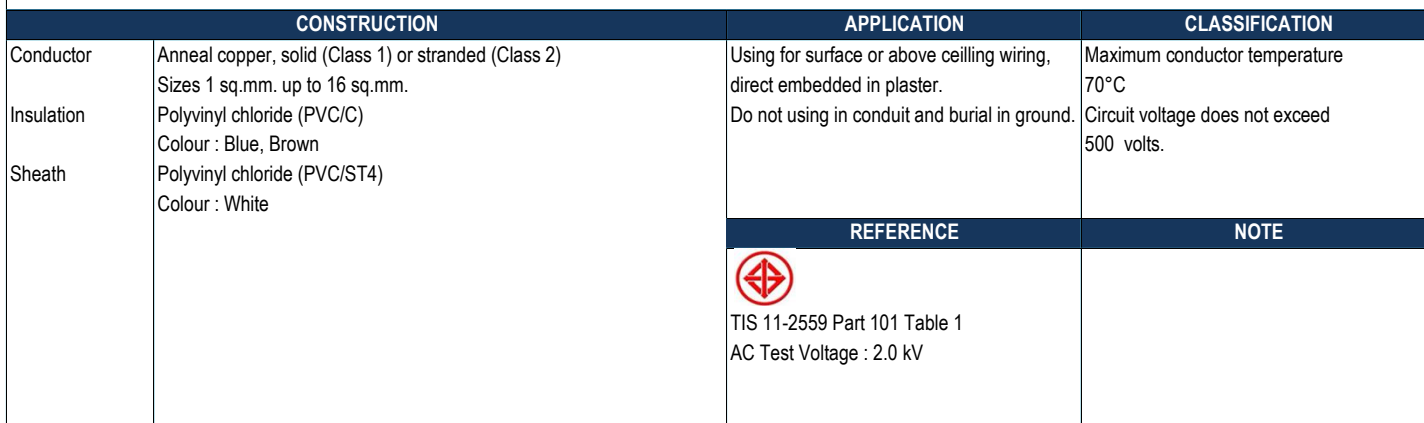

C = Packing in coil

Building Wire & Low Voltage Power Cable