




CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : **CTW-RE-2Y(ST)2YSWAY-PS**

Standard : BS 5308 Part 1 Type 2

: Multi pairs , PE Insulation, Individual & Collective Screen, PVC Sheath, Armour 300/500 V

PAGE 1/2

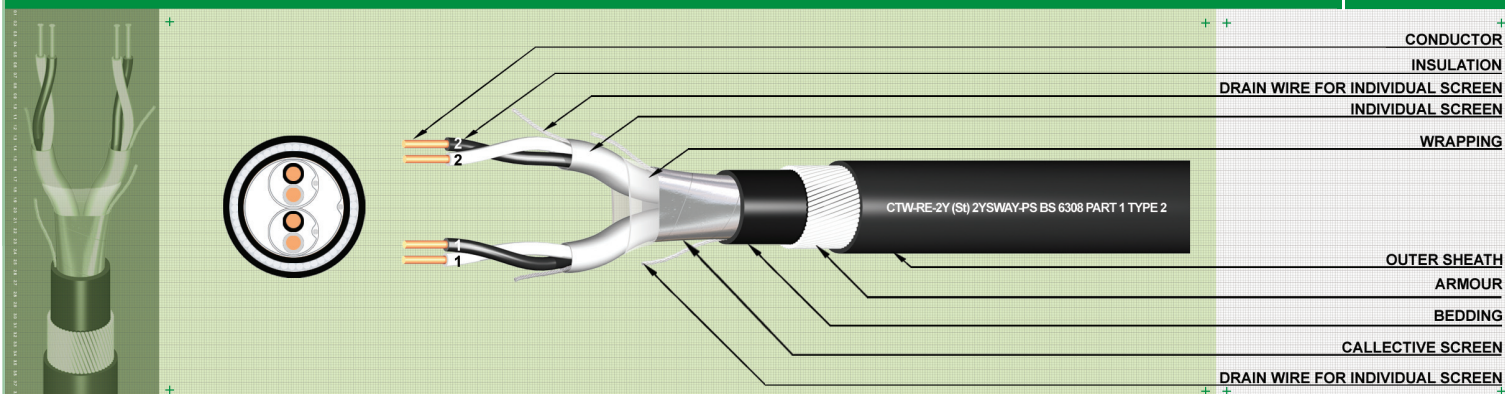

APPLICATION

For transmission of analog and digital signals in instrument and control systems; use in zone 1 and zone 2 group II classified areas (IEC 60079 part 14). Not allowed for direct connection to low impedance source, e.g. the public mains electricity. Not recommended for direct burial. For indoor and outdoor installation in dry and wet location on racks, in conduits.

CONSTRUCTION

Conductor : Plain annealed copper wire in according to BS 6360
 Insulation : Polyethylene (PE) Type 03 in according to BS 6234
 Colour code : BLACK / WHITE with continuous print numbered on cores
 (Optional : According to BS 5038 Part 1)
 Individual Screen : Consisting of Aluminum foil in contact with Tinned-Cu drain wire 0.5 mm².
 Wrapping : At least 1 layer of polyester tape
 Collective screen : Consisting of Aluminum foil in contact with Tinned-Cu drain wire 0.5 mm².
 Bedding : Black Polyethylene (PE) Type 03 in according to BS 6234
 Armour : Galvanized round Steel Wire (SWA)
 Outer sheath : Black Polyvinyl chloride (PVC) Type TM1 in according to BS 6746

OPTIONAL REQUEST

A special FR-PVC or Low Smoke HalogenFree (LSHF)
 * Flame retardant sheath can be supplied in accordance with BS4066 part 3
 * For LSHF only : BS 6425, BS 7622, BS4066 part 3

TECHNICAL DATA

Flame retardant : BS 4066 part 1
 Temperature range : Maximum conductor operating temperature : +65°C
 Minimum ambient temperature : -40°C
 after installation and only when cable is in a fixed position
 Minimum bending radius : 8 x Cable- ϕ

ABBREVIATIONS

CTW : Trade mark
 RE : Instrumentation cable
 2Y : PE insulation
 (ST) : Aluminum foil with tinned-copper drain wire screening
 SWA : Galvanized round steel wire
 Y : PVC outer sheath
 PS : Pair

ELECTRICAL DATA AT 20°C

DESCRIPTION	Character	Unit	Values			
Conductor size	nom.	mm ²	0.5 solid	0.5 flexible	1.0 Solid	1.5 Stranded
Conductor resistance	max.	Ω /km.	36.8	39.7	18.4	12.3
Insulation resistance	min.	M Ω -km.	5,000	5,000	5,000	5,000
Mutual capacitance at 1kHz						
One pair and two pair	max.	nF/km.	115	115	115	115
Capacitance unbalance at 1 kHz	max.	pF/250m	250	250	250	250
L/R (ratio)	max.	μ H/ Ω	25	25	25	40
Test Voltage U_{rms} core : core		V	1,000	1,000	1,000	1,000
U_{rms} core : screen		V	1,000	1,000	1,000	1,000
Rate voltage U_0/U	max.	V	300/500	300/500	300/500	300/500




CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : **CTW-RE-2Y(ST)2YSWAY-PS**

Standard : BS 5308 Part 1 Type 2

: Multi pairs , PE Insulation, Individual & Collective Screen, PVC Sheath, Armour 300/500 V

PAGE 2/2

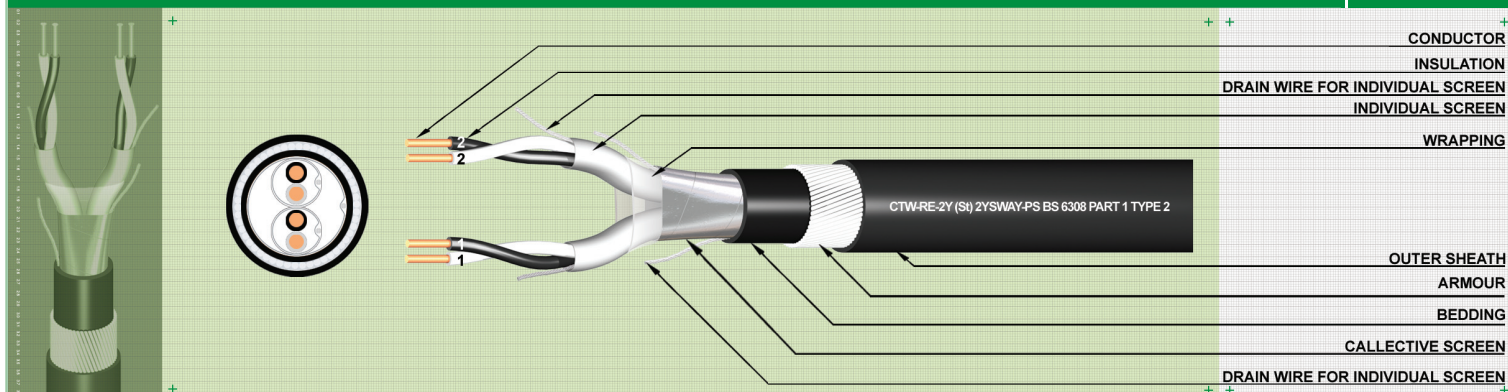

APPLICATION

For transmission of analog and digital signals in instrument and control systems; use in zone 1 and zone 2 group II classified areas (IEC 60079 part 14). Not allowed for direct connection to low impedance source, e.g. the public mains electricity

Not recommended for direct burial. For indoor and outdoor installation in dry and wet location on racks, in conduits

Product code	Number of pairs	Nominal radial thickness of insulation mm	Nominal radial thickness of bedding mm	Diameter over bedding (approx.) mm	Armour wire diameter mm	Nominal radial thickness of outer sheath mm	Overall diameter (approx.) mm	Approx. Cable weight kg/km	Standard packing m/R
Conductor 0.5 sq.mm. (1/0.8mm.) Class 1									
T43270002	2	0.5	0.9	9.7	0.9	1.4	14.3	345	1,000
T43270005	5	0.5	1.2	13.0	1.25	1.5	18.5	610	1,000
T43270010	10	0.5	1.2	16.9	1.25	1.7	22.8	870	1,000
T43270015	15	0.5	1.3	19.7	1.6	1.7	26.3	1,265	1,000
T43270020	20	0.5	1.3	22.3	1.6	1.8	29.1	1,475	1,000
T43270030	30	0.5	1.5	27.1	1.6	1.9	34.1	1,915	1,000
T43270050	50	0.5	2.0	35.0	2.0	2.2	43.4	3,075	500
Conductor 0.5 sq.mm. (16/0.2mm.) class 5									
T43280002	2	0.6	1.1	11.2	0.9	1.5	16.0	400	1,000
T43280005	5	0.6	1.2	14.5	1.25	1.6	20.2	680	1,000
T43280010	10	0.6	1.3	19.3	1.6	1.8	26.1	1,175	1,000
T43280015	15	0.6	1.5	22.6	1.6	1.8	29.4	1,420	1,000
T43280020	20	0.6	1.5	25.7	1.6	1.9	32.7	1,680	1,000
T43280030	30	0.6	1.7	31.0	2.0	2.1	39.2	2,415	1,000
T43280050	50	0.6	2.2	39.9	2.4	2.4	49.7	3,940	500
Conductor 1.0 sq.mm. (1/1.3mm.) class 1									
T43180002	2	0.6	1.1	11.9	0.9	1.5	16.7	435	1,000
T43180005	5	0.6	1.2	15.4	1.25	1.6	21.1	755	1,000
T43180010	10	0.6	1.3	20.5	1.6	1.8	27.3	1,300	1,000
T43180015	15	0.6	1.5	24.1	1.6	1.9	31.1	1,665	1,000
T43180020	20	0.6	1.7	27.7	2.0	2.0	35.7	2,240	1,000
T43180030	30	0.6	2.0	33.7	2.0	2.2	42.1	2,950	1,000
T43180050	50	0.6	2.2	42.5	2.5	2.5	52.5	4,639	500
Conductor 1.5 sq.mm. (7/0.53mm.) class 2									
T43200002	2	0.6	1.2	13.6	1.25	1.6	19.3	635	1,000
T43200005	5	0.6	1.3	17.7	1.6	1.7	24.3	1,070	1,000
T43200010	10	0.6	1.5	23.9	1.6	1.9	30.9	1,605	1,000
T43200015	15	0.6	1.7	28.0	2.0	2.0	36.0	2,280	1,000
T43200020	20	0.6	1.7	31.7	2.0	2.1	39.9	2,730	1,000
T43200030	30	0.6	2.0	38.6	2.5	2.5	48.6	4,075	1,000
T43200050	50	0.6	2.2	48.9	2.7	2.7	59.3	5,765	500