




CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : **CTW-RE-Y(ST)YSWAY-PR**

Standard : BS 5308 Part 2 Type 2

: Multi pairs , PVC Insulation, Collective Screen, PVC Sheath, Armour 300/500 V

PAGE 1/2

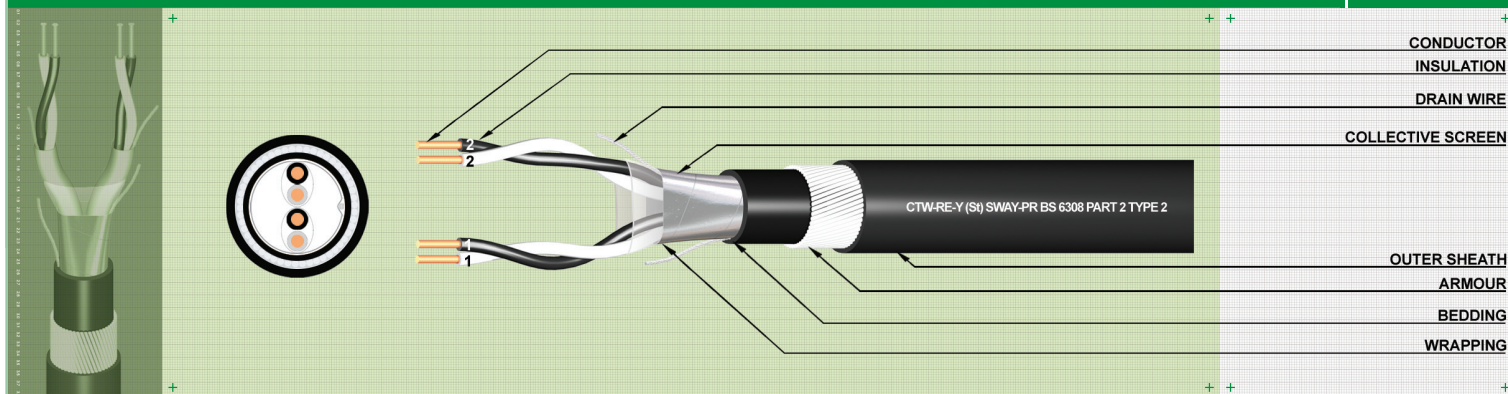

APPLICATION

For transmission of analog and digital signals in instrument and control systems; use in zone 1 and zone 2 group II classified areas (IEC 60079 part 14). Not allowed for direct connection to low impedance source, e.g. the public mains electricity
Not recommended for direct burial. For indoor and outdoor installation in dry and wet location on racks, in conduits

CONSTRUCTION

Conductor : Plain annealed copper wire in according to BS 6360
Insulation : Polyvinyl chloride (PVC) Type T11 in according to BS 6746
Colour code : BLACK / WHITE with continuous print numbered on cores
(Optional : According to BS 5038 Part 2)
Wrapping : At least 1 layer of polyester tape
Collective screen : Consisting of Aluminum foil in contact with Tinned-Cu drain wire 0.5 mm².
Bedding : Black polyvinyl chloride (PVC) Type TM1 in according to BS 6746
Armour : Galvanized round Steel Wire (SWA)
Outer sheath : Black polyvinyl chloride (PVC) Type TM1 in according to BS 6746

OPTIONAL REQUEST

A special FR-PVC or Low Smoke HalogenFree (LSHF)
* Flame retardant sheath can be supplied in accordance with BS4066 part 3
* For LSHF only : BS 6425, BS 7622, BS4066 part 3

TECHNICAL DATA

Flame retardant : BS 4066 part 1
Temperature range : Maximum conductor operating temperature : +65°C
Minimum ambient temperature : -40°C
after installation and only when cable is in a fixed position
Minimum bending radius : 8 x Cable- ϕ

ABBREVIATIONS

CTW : Trade mark
RE : Instrumentation cable
Y : PE insulation
(ST : Aluminum foil with tinned-copper drain wire screening
SWA : Galvanized round steel wire
Y : PVC outer sheath
PS : Pair

ELECTRICAL DATA AT 20°C

DESCRIPTION	Character	Unit	Values		
Conductor size	nom.	mm ²	0.5 flexible	0.75 flexible	1.5 stranded
Conductor resistance	max.	Ω /km.	39.7	26.5	12.3
Insulation resistance	min.	M Ω -km.	25	25	25
Mutual capacitance at 1kHz					
One pair and two pair	max.	nF/km.	250	250	250
capacitance unbalance at 1 kHz	max.	pF/250m	400	400	400
L/R (ratio)	max.	μ H/ Ω	25	25	40
Test Voltage U_{rms} core : core		V	1,000	1,000	1,000
U_{rms} core : screen		V	1,000	1,000	1,000
Rate voltage U_0/U	max.	V	300/500	300/500	300/500




CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : **CTW-RE-Y(ST)YSWAY-PR**

Standard : BS 5308 Part 2 Type 2

: Multi pairs , PVC Insulation, Collective Screen, PVC Sheath, Armour 300/500 V

PAGE 2/2

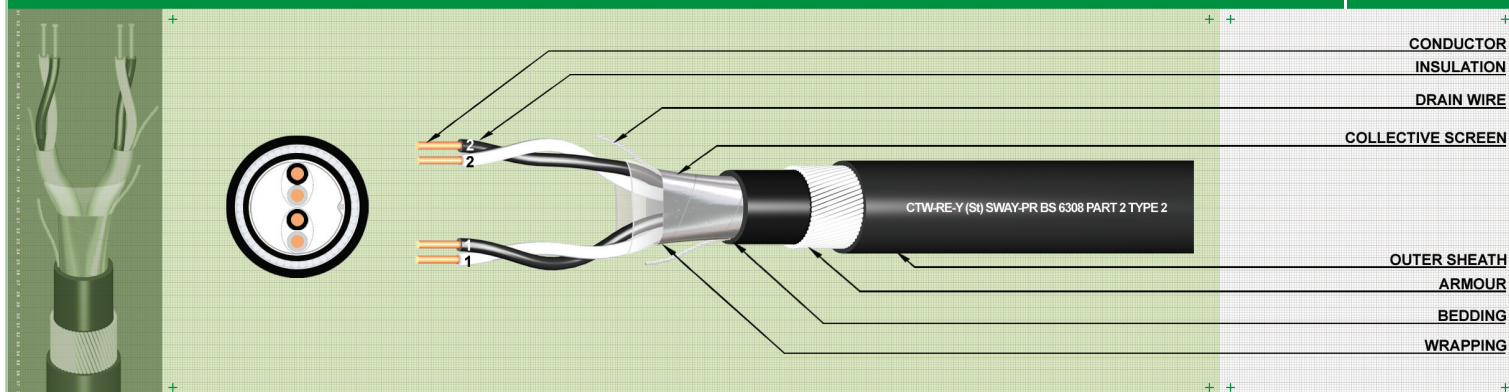

APPLICATION

For transmission of analog and digital signals in instrument and control systems; use in zone 1 and zone 2 group II classified areas (IEC 60079 part 14). Not allowed for direct connection to low impedance source, e.g. the public mains electricity

Not recommended for direct burial. For indoor and outdoor installation in dry and wet location on racks, in conduits

Product code	Number of pairs	Nominal radial thickness of insulation mm	Nominal radial thickness of bedding mm	Diameter over bedding (approx.) mm	Armour wire diameter mm	Nominal radial thickness of outer sheath mm	Overall diameter (approx.) mm	Approx. Cable weight kg/km	Standard packing m/R
Conductor 0.5 sq.mm. (16/0.2mm.) Class 5									
T48280001	1	0.6	0.8	6.2	0.9	1.3	10.6	230	1,000
T48280002	2	0.6	0.8	7.1	0.9	1.3	11.5	260	1,000
T48280005	5	0.6	1.1	12.4	0.9	1.5	17.2	490	1,000
T48280010	10	0.6	1.2	16.5	1.25	1.6	22.2	840	1,000
T48280015	15	0.6	1.3	19.2	1.6	1.7	25.8	1,220	1,000
T48280020	20	0.6	1.3	21.7	1.6	1.8	28.5	1,430	1,000
T48280030	30	0.6	1.5	26.4	1.6	1.9	33.4	1,890	1,000
T48280050	50	0.6	1.7	33.4	2.0	2.1	41.6	2,910	500
Conductor 0.75 sq.mm. (24/0.2mm.) class 5									
T48310001	1	0.6	0.8	6.7	0.9	1.3	11.1	250	1,000
T48310002	2	0.6	0.8	7.7	0.9	1.4	12.3	300	1,000
T48310005	5	0.6	1.2	13.8	1.25	1.5	19.3	670	1,000
T48310010	10	0.6	1.3	18.4	1.6	1.7	25.0	1,190	1,000
T48310015	15	0.6	1.3	21.1	1.6	1.8	27.9	1,390	1,000
T48310020	20	0.6	1.5	24.4	1.6	1.8	31.2	1,700	1,000
T48310030	30	0.6	1.7	29.6	2.0	2.0	37.6	2,490	1,000
T48310050	50	0.6	2.0	37.6	2.5	2.3	47.3	3,930	500
Conductor 1.5 sq.mm. (7/0.53mm.) class 2									
T48200001	1	0.6	0.8	7.5	0.9	1.4	12.1	290	1,000
T48200002	2	0.6	0.9	8.8	0.9	1.4	13.4	390	1,000
T48200005	5	0.6	1.2	15.6	1.25	1.6	21.3	850	1,000
T48200010	10	0.6	1.3	20.9	1.6	1.8	27.7	1,460	1,000
T48200015	15	0.6	1.5	24.6	1.6	1.9	31.6	1,900	1,000
T48200020	20	0.6	1.5	27.8	1.6	2.0	35.0	2,240	1,000
T48200030	30	0.6	1.7	33.7	2.0	2.1	41.9	3,310	1,000
T48200050	50	0.6	2.0	43.0	2.5	2.4	52.8	5,290	500