




CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : CTW-FCVV 600 V (FLEXIBLE CONDUCTOR)

: 600 V 75°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 1/8

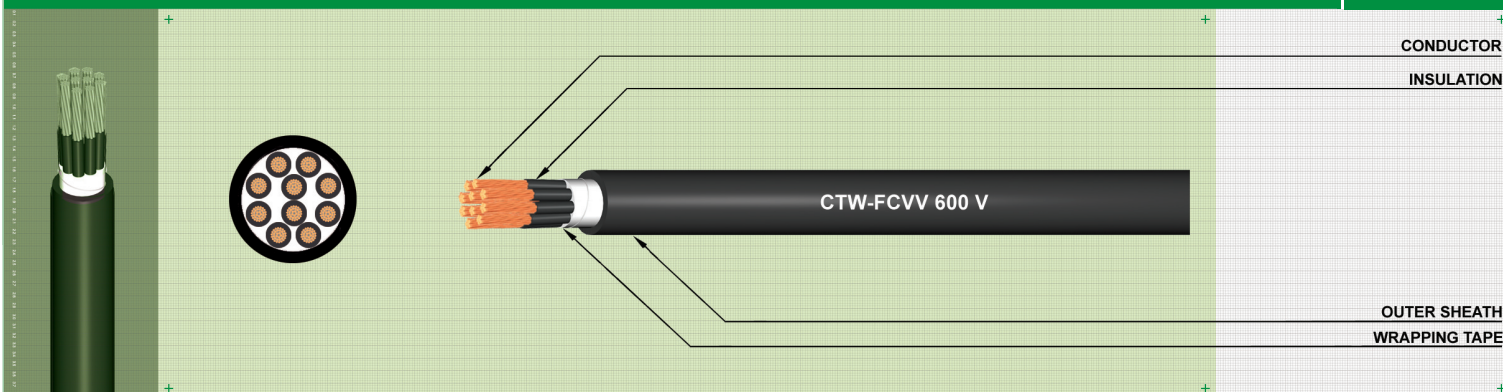

APPLICATION

Supervisory electrical equipment, station control circuits. Out door, suitable installation in the wet or dry cable trenches.

CONSTRUCTION

Conductor : Concentric bunching (Flexible) annealed copper conductor.
 Insulation : Polyvinyl chloride (PVC) : Black colour with marking number.
 Filler : PVC Rod and/or Polypropylene (Nonhygroscopic material).
 Wrapping Tape : Polyester (Mylar) tape.
 Outer Sheath : Black polyvinyl chloride (PVC) .

*** Colours sequence for circuit identification & other colours for outer sheath to special order.

REFERENCE STANDARD

ICEA S-61-402 (NEMA WC 5).
 *Testing Voltage : 1.5, 3.0, 3.5 kV (By Conductor Size).

CLASSIFICATION

Maximum conductor temperature 75°C,
 Circuit voltage does not exceed 600 volts.

OPTIONAL

A Special FR-PVC flame retardant sheath can be supplied.

CTW - FCVV 600V (ICEA S-61-402)		Conductor			Thickness of Insulation	Thickness of Outer Sheath	Overall diameter (Approx.)	Cable weight (Approx.)	Maximum conductor resistance at 20 °C	Minimum insulation resistance at 15.6 °C	Standard packing
PRODUCT CODE	No. of Core	Nominal Cross-sectional area mm ²	Number and diameter of wire No. / mm	Diameter (Approx.) mm							
C18026005	2	0.5	16 / 0.20	0.95	0.76	1.14	7.5	80	39.00	272	1,000
C18026075		0.75	24 / 0.20	1.15	0.76	1.14	8.0	90	26.00	239	1,000
C18026001		1.0	32 / 0.20	1.35	0.76	1.14	8.5	100	19.50	217	1,000
C18026501		1.5	30 / 0.25	1.65	1.14	1.14	10.5	150	13.30	243	1,000
C18026502		2.5	50 / 0.25	2.15	1.14	1.14	11.5	190	7.98	205	1,000
C18026004		4	56 / 0.30	2.65	1.14	1.14	12.5	240	4.95	173	1,000
C18026006		6	84 / 0.30	3.40	1.14	1.52	14.5	330	3.30	149	1,000
C18026010		10	80 / 0.40	4.30	1.52	1.52	18.0	520	1.91	149	1,000
C18036005	3	0.5	16 / 0.20	0.95	0.76	1.14	8.0	90	39.00	272	1,000
C18036075		0.75	24 / 0.20	1.15	0.76	1.14	8.5	100	26.00	239	1,000
C18036001		1.0	32 / 0.20	1.35	0.76	1.14	9.0	120	19.50	217	1,000
C18036501		1.5	30 / 0.25	1.65	1.14	1.14	11.0	180	13.30	243	1,000
C18036502		2.5	50 / 0.25	2.15	1.14	1.14	12.0	230	7.98	205	1,000
C18036004		4	56 / 0.30	2.65	1.14	1.14	14.5	320	4.95	173	1,000
C18036006		6	84 / 0.30	3.40	1.14	1.52	15.5	410	3.30	149	1,000
C18036010		10	80 / 0.40	4.30	1.52	1.52	19.5	650	1.91	149	1,000



CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : CTW-FCVV 600 V (FLEXIBLE CONDUCTOR)

: 600 V 75°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 2/8

CTW - FCVV 600V (ICEA S-61-402)		Conductor			Thickness of Insulation	Thickness of Outer Sheath	Overall diameter (Approx.)	Cable weight (Approx.)	Maximum conductor resistance at 20 °C	Minimum insulation resistance at 15.6 °C	Standard packing
		Nominal Cross-sectional area	Number and diameter of wire	Diameter (Approx.)							
PRODUCT CODE	No. of Core	mm ²	No. / mm	mm	mm	mm	mm	kg/km	Ω/km	MΩ-km	m/R
C18046005	4	0.5	16 / 0.20	0.95	0.76	1.14	9.0	110	39.00	272	1,000
C18046075		0.75	24 / 0.20	1.15	0.76	1.14	9.5	130	26.00	239	1,000
C18046001		1.0	32 / 0.20	1.35	0.76	1.14	10.0	140	19.50	217	1,000
C18046501		1.5	30 / 0.25	1.65	1.14	1.14	12.5	220	13.30	243	1,000
C18046502		2.5	50 / 0.25	2.15	1.14	1.52	14.0	310	7.98	205	1,000
C18046004		4	56 / 0.30	2.65	1.14	1.52	15.5	400	4.95	173	1,000
C18046006		6	84 / 0.30	3.40	1.14	1.52	17.0	510	3.30	149	1,000
C18046010		10	80 / 0.40	4.30	1.52	2.03	22.5	870	1.91	149	1,000
C18056005	5	0.5	16 / 0.20	0.95	0.76	1.14	9.5	120	39.00	272	1,000
C18056075		0.75	24 / 0.20	1.15	0.76	1.14	10.0	140	26.00	239	1,000
C18056001		1.0	32 / 0.20	1.35	0.76	1.14	10.5	160	19.50	217	1,000
C18056501		1.5	30 / 0.25	1.65	1.14	1.52	14.5	280	13.30	243	1,000
C18056502		2.5	50 / 0.25	2.15	1.14	1.52	15.5	360	7.98	205	1,000
C18056004		4	56 / 0.30	2.65	1.14	1.52	17.0	470	4.95	173	1,000
C18056006		6	84 / 0.30	3.40	1.14	1.52	18.5	600	3.30	149	1,000
C18056010		10	80 / 0.40	4.30	1.52	2.03	24.5	1,020	1.91	149	1,000
C18066005	6	0.5	16 / 0.20	0.95	0.76	1.14	10.5	140	39.00	272	1,000
C18066075		0.75	24 / 0.20	1.15	0.76	1.14	11.0	170	26.00	239	1,000
C18066001		1.0	32 / 0.20	1.35	0.76	1.14	11.5	200	19.50	217	1,000
C18066501		1.5	30 / 0.25	1.65	1.14	1.52	15.5	330	13.30	243	1,000
C18066502		2.5	50 / 0.25	2.15	1.14	1.52	17.0	430	7.98	205	1,000
C18066004		4	56 / 0.30	2.65	1.14	1.52	18.5	560	4.95	173	1,000
C18066006		6	84 / 0.30	3.40	1.14	1.52	20.5	720	3.30	149	1,000
C18066010		10	80 / 0.40	4.30	1.52	2.03	26.5	1,220	1.91	149	1,000
C18076005	7	0.5	16 / 0.20	0.95	0.76	1.14	10.5	150	39.00	272	1,000
C18076075		0.75	24 / 0.20	1.15	0.76	1.14	11.0	180	26.00	239	1,000
C18076001		1.0	32 / 0.20	1.35	0.76	1.14	11.5	200	19.50	217	1,000
C18076501		1.5	30 / 0.25	1.65	1.14	1.52	15.5	340	13.30	243	1,000
C18076502		2.5	50 / 0.25	2.15	1.14	1.52	17.0	450	7.98	205	1,000
C18076004		4	56 / 0.30	2.65	1.14	1.52	18.5	590	4.95	173	1,000
C18076006		6	84 / 0.30	3.40	1.14	1.52	20.5	770	3.30	149	1,000
C18076010		10	80 / 0.40	4.30	1.52	2.03	26.5	1,300	1.91	149	1,000



CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : **CTW-FCVV 600 V (FLEXIBLE CONDUCTOR)**

: 600 V 75°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 3/8

CTW - FCVV 600V (ICEA S-61-402)		Conductor			Thickness of Insulation	Thickness of Outer Sheath	Overall diameter (Approx.)	Cable weight (Approx.)	Maximum conductor resistance at 20 °C	Minimum insulation resistance at 15.6 °C	Standard packing
		Nominal Cross-sectional area	Number and diameter of wire	Diameter (Approx.)							
PRODUCT CODE	No. of Core	mm ²	No. / mm	mm	mm	mm	mm	kg/km	Ω/km	MΩ-km	m/R
C18086005	8	0.5	16 / 0.20	0.95	0.76	1.14	11	170	39.00	272	1,000
C18086075		0.75	24 / 0.20	1.15	0.76	1.14	12.0	200	26.00	239	1,000
C18086001		1.0	32 / 0.20	1.35	0.76	1.14	12.5	240	19.50	217	1,000
C18086501		1.5	30 / 0.25	1.65	1.14	1.52	16.5	400	13.30	243	1,000
C18086502		2.5	50 / 0.25	2.15	1.14	1.52	18.5	520	7.98	205	1,000
C18086004		4	56 / 0.30	2.65	1.14	1.52	20.0	680	4.95	173	1,000
C18086006		6	84 / 0.30	3.40	1.14	2.03	23.0	950	3.30	149	1,000
C18086010		10	80 / 0.40	4.30	1.52	2.03	29.0	1,500	1.91	149	1,000
C18096005	9	0.5	16 / 0.20	0.95	0.76	1.14	12.0	190	39.00	272	1,000
C18096075		0.75	24 / 0.20	1.15	0.76	1.14	13.0	230	26.00	239	1,000
C18096001		1.0	32 / 0.20	1.35	0.76	1.52	14.0	290	19.50	217	1,000
C18096501		1.5	30 / 0.25	1.65	1.14	1.52	18.0	450	13.30	243	1,000
C18096502		2.5	50 / 0.25	2.15	1.14	1.52	20.0	580	7.98	205	1,000
C18096004		4	56 / 0.30	2.65	1.14	2.03	23.0	830	4.95	173	1,000
C18096006		6	84 / 0.30	3.40	1.14	2.03	25.0	1,070	3.30	149	1,000
C18096010		10	80 / 0.40	4.30	1.52	2.03	31.5	1,710	1.91	149	1,000
C18106005	10	0.5	16 / 0.20	0.95	0.76	1.52	14.0	240	39.00	272	1,000
C18106075		0.75	24 / 0.20	1.15	0.76	1.52	14.5	290	26.00	239	1,000
C18106001		1.0	32 / 0.20	1.35	0.76	1.52	15.5	330	19.50	217	1,000
C18106501		1.5	30 / 0.25	1.65	1.14	1.52	19.5	510	13.30	243	1,000
C18106502		2.5	50 / 0.25	2.15	1.14	2.03	22.5	720	7.98	205	1,000
C18106004		4	56 / 0.30	2.65	1.14	2.03	25.0	940	4.95	173	1,000
C18106006		6	84 / 0.30	3.40	1.14	2.03	27.0	1,210	3.30	149	1,000
C18106010		10	80 / 0.40	4.30	1.52	2.03	34.5	1,930	1.91	149	500
C18116005	11	0.5	16 / 0.20	0.95	0.76	1.52	14	250	39.00	272	1,000
C18116075		0.75	24 / 0.20	1.15	0.76	1.52	14.5	300	26.00	239	1,000
C18116001		1.0	32 / 0.20	1.35	0.76	1.52	15.5	350	19.50	217	1,000
C18116501		1.5	30 / 0.25	1.65	1.14	1.52	19.5	540	13.30	243	1,000
C18116502		2.5	50 / 0.25	2.15	1.14	2.03	22.5	750	7.98	205	1,000
C18116004		4	56 / 0.30	2.65	1.14	2.03	25.0	990	4.95	173	1,000
C18116006		6	84 / 0.30	3.40	1.14	2.03	27.0	1,290	3.30	149	1,000
C18116010		10	80 / 0.40	4.30	1.52	2.03	34.5	2,060	1.91	149	500



CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : CTW-FCVV 600 V (FLEXIBLE CONDUCTOR)

: 600 V 75°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 5/8

CTW - FCVV 600V (ICEA S-61-402)		Conductor			Thickness of Insulation	Thickness of Outer Sheath	Overall diameter (Approx.)	Cable weight (Approx.)	Maximum conductor resistance at 20 °C	Minimum insulation resistance at 15.6 °C	Standard packing
PRODUCT CODE	No. of Core	Nominal Cross-sectional area	Number and diameter of wire	Diameter (Approx.)							
		mm ²	No. / mm	mm	mm	mm	mm	kg/km	Ω/km	MΩ-km	m/R
C18166005	16	0.5	16 / 0.20	0.95	0.76	1.52	15.5	330	39.00	272	1,000
C18166075		0.75	24 / 0.20	1.15	0.76	1.52	16.5	400	26.00	239	1,000
C18166001		1.0	32 / 0.20	1.35	0.76	1.52	17.5	460	19.50	217	1,000
C18166501		1.5	30 / 0.25	1.65	1.14	2.03	23.5	780	13.30	243	1,000
C18166502		2.5	50 / 0.25	2.15	1.14	2.03	26.0	1,010	7.98	205	1,000
C18166004		4	56 / 0.30	2.65	1.14	2.03	28.5	1,340	4.95	173	1,000
C18166006		6	84 / 0.30	3.40	1.14	2.03	31.5	1,760	3.30	149	1,000
C18166010		10	80 / 0.40	4.30	1.52	2.03	39.5	2,830	1.91	149	500
C18176005	17	0.5	16 / 0.20	0.95	0.76	1.52	16.0	350	39.00	272	1,000
C18176075		0.75	24 / 0.20	1.15	0.76	1.52	17.0	420	26.00	239	1,000
C18176001		1.0	32 / 0.20	1.35	0.76	1.52	18.0	480	19.50	217	1,000
C18176501		1.5	30 / 0.25	1.65	1.14	2.03	24.0	820	13.30	243	1,000
C18176502		2.5	50 / 0.25	2.15	1.14	2.03	26.5	1,070	7.98	205	1,000
C18176004		4	56 / 0.30	2.65	1.14	2.03	29.5	1,420	4.95	173	1,000
C18176006		6	84 / 0.30	3.40	1.14	2.03	32.0	1,860	3.30	149	1,000
C18176010		10	80 / 0.40	4.30	1.52	2.03	41.0	3,000	1.91	149	500
C18186005	18	0.5	16 / 0.20	0.95	0.76	1.52	16.5	370	39.00	272	1,000
C18186075		0.75	24 / 0.20	1.15	0.76	1.52	17.5	440	26.00	239	1,000
C18186001		1.0	32 / 0.20	1.35	0.76	1.52	18.5	510	19.50	217	1,000
C18186501		1.5	30 / 0.25	1.65	1.14	2.03	25.0	860	13.30	243	1,000
C18186502		2.5	50 / 0.25	2.15	1.14	2.03	27.0	1,130	7.98	205	1,000
C18186004		4	56 / 0.30	2.65	1.14	2.03	30.0	1,500	4.95	173	1,000
C18186006		6	84 / 0.30	3.40	1.14	2.03	33.0	1,970	3.30	149	500
C18186010		10	80 / 0.40	4.30	1.52	2.03	42.0	3,180	1.91	149	500
C18196005	19	0.5	16 / 0.20	0.95	0.76	1.52	16.5	370	39.00	272	1,000
C18196075		0.75	24 / 0.20	1.15	0.76	1.52	17.5	450	26.00	239	1,000
C18196001		1.0	32 / 0.20	1.35	0.76	1.52	18.5	520	19.50	217	1,000
C18196501		1.5	30 / 0.25	1.65	1.14	2.03	25.0	880	13.30	243	1,000
C18196502		2.5	50 / 0.25	2.15	1.14	2.03	27.0	1,150	7.98	205	1,000
C18196004		4	56 / 0.30	2.65	1.14	2.03	30.0	1,530	4.95	173	1,000
C18196006		6	84 / 0.30	3.40	1.14	2.03	33.0	2,010	3.30	149	500
C18196010		10	80 / 0.40	4.30	1.52	2.03	42.0	3,260	1.91	149	500



CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : CTW-FCVV 600 V (FLEXIBLE CONDUCTOR)

: 600 V 75°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 3/8

CTW - FCVV 600V (ICEA S-61-402)		Conductor			Thickness of Insulation	Thickness of Outer Sheath	Overall diameter (Approx.)	Cable weight (Approx.)	Maximum conductor resistance at 20 °C	Minimum insulation resistance at 15.6 °C	Standard packing
		Nominal Cross-sectional area	Number and diameter of wire	Diameter (Approx.)							
PRODUCT CODE	No. of Core	mm ²	No. / mm	mm	mm	mm	mm	kg/km	Ω/km	MΩ-km	m/R
C18206005	20	0.5	16 / 0.20	0.95	0.76	1.52	17.0	390	39.00	272	1,000
C18206075		0.75	24 / 0.20	1.15	0.76	1.52	18.0	470	26.00	239	1,000
C18206001		1.0	32 / 0.20	1.35	0.76	1.52	19.0	550	19.50	217	1,000
C18206501		1.5	30 / 0.25	1.65	1.14	2.03	25.5	920	13.30	243	1,000
C18206502		2.5	50 / 0.25	2.15	1.14	2.03	28.0	1,210	7.98	205	1,000
C18206004		4	56 / 0.30	2.65	1.14	2.03	31.0	1,610	4.95	173	1,000
C18206006		6	84 / 0.30	3.40	1.14	2.03	34.0	2,120	3.30	149	500
C18206010		10	80 / 0.40	4.30	1.52	2.79	44.5	3,590	1.91	149	500
C18216005	21	0.5	16 / 0.20	0.95	0.76	1.52	17.5	410	39.00	272	1,000
C18216075		0.75	24 / 0.20	1.15	0.76	1.52	18.5	490	26.00	239	1,000
C18216001		1.0	32 / 0.20	1.35	0.76	1.52	19.5	570	19.50	217	1,000
C18216501		1.5	30 / 0.25	1.65	1.14	2.03	26.0	960	13.30	243	1,000
C18216502		2.5	50 / 0.25	2.15	1.14	2.03	28.5	1,260	7.98	205	1,000
C18216004		4	56 / 0.30	2.65	1.14	2.03	31.5	1,680	4.95	173	1,000
C18216006		6	84 / 0.30	3.40	1.14	2.03	35.0	2,220	3.30	149	500
C18216010		10	80 / 0.40	4.30	1.52	2.79	45.5	3,760	1.91	149	500
C18226005	22	0.5	16 / 0.20	0.95	0.76	1.52	18.0	430	39.00	272	1,000
C18226075		0.75	24 / 0.20	1.15	0.76	1.52	19.0	510	26.00	239	1,000
C18226001		1.0	32 / 0.20	1.35	0.76	1.52	20.0	600	19.50	217	1,000
C18226501		1.5	30 / 0.25	1.65	1.14	2.03	27.0	1,000	13.30	243	1,000
C18226502		2.5	50 / 0.25	2.15	1.14	2.03	29.5	1,320	7.98	205	1,000
C18226004		4	56 / 0.30	2.65	1.14	2.03	32.5	1,770	4.95	173	1,000
C18226006		6	84 / 0.30	3.40	1.14	2.03	36.0	2,330	3.30	149	500
C18226010		10	80 / 0.40	4.30	1.52	2.79	47.0	3,940	1.91	149	500
C18236005	23	0.5	16 / 0.20	0.95	0.76	1.52	18.0	440	39.00	272	1,000
C18236075		0.75	24 / 0.20	1.15	0.76	1.52	19.5	530	26.00	239	1,000
C18236001		1.0	32 / 0.20	1.35	0.76	1.52	20.5	620	19.50	217	1,000
C18236501		1.5	30 / 0.25	1.65	1.14	2.03	27.5	1,040	13.30	243	1,000
C18236502		2.5	50 / 0.25	2.15	1.14	2.03	30.0	1,380	7.98	205	1,000
C18236004		4	56 / 0.30	2.65	1.14	2.03	33.0	1,840	4.95	173	500
C18236006		6	84 / 0.30	3.40	1.14	2.03	36.5	2,430	3.30	149	500
C18236010		10	80 / 0.40	4.30	1.52	2.79	48.0	4,110	1.91	149	500



CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : CTW-FCVV 600 V (FLEXIBLE CONDUCTOR)

: 600 V 75°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 7/8

CTW - FCVV 600V (ICEA S-61-402)		Conductor			Thickness of Insulation	Thickness of Outer Sheath	Overall diameter (Approx.)	Cable weight (Approx.)	Maximum conductor resistance at 20 °C	Minimum insulation resistance at 15.6 °C	Standard packing
		Nominal Cross-sectional area	Number and diameter of wire	Diameter (Approx.)							
PRODUCT CODE	No. of Core	mm ²	No. / mm	mm	mm	mm	mm	kg/km	Ω/km	MΩ-km	m/R
C18246005	24	0.5	16 / 0.20	0.95	0.76	1.52	19.0	480	39.00	272	1,000
C18246075		0.75	24 / 0.20	1.15	0.76	1.52	20.5	580	26.00	239	1,000
C18246001		1.0	32 / 0.20	1.35	0.76	2.03	22.5	720	19.50	217	1,000
C18246501		1.5	30 / 0.25	1.65	1.14	2.03	29.0	1,130	13.30	243	1,000
C18246502		2.5	50 / 0.25	2.15	1.14	2.03	32.0	1,480	7.98	205	1,000
C18246004		4	56 / 0.30	2.65	1.14	2.03	35.0	1,980	4.95	173	500
C18246006		6	84 / 0.30	3.40	1.14	2.03	39.0	2,600	3.30	149	500
C18246010		10	80 / 0.40	4.30	1.52	2.79	51.0	4,400	1.91	149	500
C18256005	25	0.5	16 / 0.20	0.95	0.76	1.52	19.0	490	39.00	272	1,000
C18256075		0.75	24 / 0.20	1.15	0.76	1.52	20.5	590	26.00	239	1,000
C18256001		1.0	32 / 0.20	1.35	0.76	2.03	22.5	740	19.50	217	1,000
C18256501		1.5	30 / 0.25	1.65	1.14	2.03	29.0	1,150	13.30	243	1,000
C18256502		2.5	50 / 0.25	2.15	1.14	2.03	32.0	1,520	7.98	205	1,000
C18256004		4	56 / 0.30	2.65	1.14	2.03	35.0	2,030	4.95	173	500
C18256006		6	84 / 0.30	3.40	1.14	2.03	39.0	2,670	3.30	149	500
C18256010		10	80 / 0.40	4.30	1.52	2.79	51.0	4,530	1.91	149	500
C18266005	26	0.5	16 / 0.20	0.95	0.76	1.52	19.0	500	39.00	272	1,000
C18266075		0.75	24 / 0.20	1.15	0.76	1.52	20.5	600	26.00	239	1,000
C18266001		1.0	32 / 0.20	1.35	0.76	2.03	22.5	760	19.50	217	1,000
C18266501		1.5	30 / 0.25	1.65	1.14	2.03	29.0	1,180	13.30	243	1,000
C18266502		2.5	50 / 0.25	2.15	1.14	2.03	32.0	1,560	7.98	205	1,000
C18266004		4	56 / 0.30	2.65	1.14	2.03	35.0	2,080	4.95	173	500
C18266006		6	84 / 0.30	3.40	1.14	2.03	39.0	2,750	3.30	149	500
C18266010		10	80 / 0.40	4.30	1.52	2.79	51.0	4,650	1.91	149	500
C18276005	27	0.5	16 / 0.20	0.95	0.76	1.52	19.5	510	39.00	272	1,000
C18276075		0.75	24 / 0.20	1.15	0.76	2.03	22.0	670	26.00	239	1,000
C18276001		1.0	32 / 0.20	1.35	0.76	2.03	23.0	780	19.50	217	1,000
C18276501		1.5	30 / 0.25	1.65	1.14	2.03	29.5	1,220	13.30	243	1,000
C18276502		2.5	50 / 0.25	2.15	1.14	2.03	32.0	1,610	7.98	205	1,000
C18276004		4	56 / 0.30	2.65	1.14	2.03	36.0	2,150	4.95	173	500
C18276006		6	84 / 0.30	3.40	1.14	2.03	39.5	2,840	3.30	149	500
C18276010		10	80 / 0.40	4.30	1.52	2.79	52.0	4,810	1.91	149	500

