


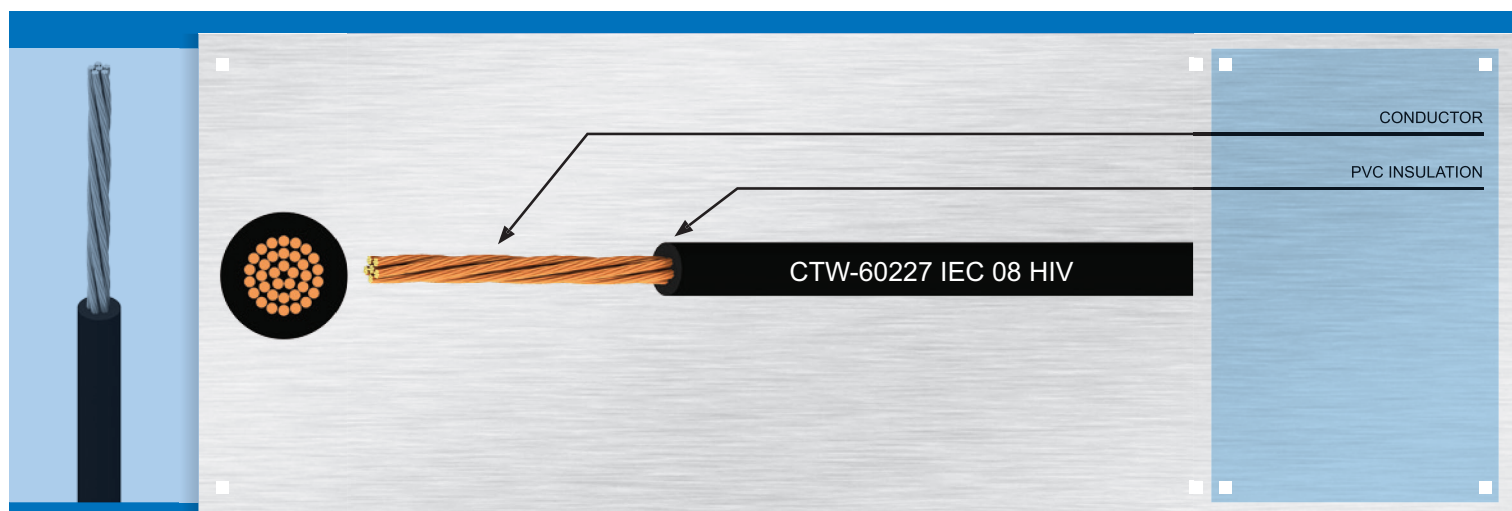

CONSTRUCTION

Conductor	Anneal copper, bunch stranded Sizes 0.5 sq.mm. up to 2.5 sq.mm.
Insulation	Polyvinyl chloride (PVC/E) (Any colour as requested)

APPLICATION

Building wiring for installation in wire way or raceway, dry location.
Do not install in conduit and direct burial in ground.

CLASSIFICATION

Maximum conductor temperature 90°C
Circuit voltage does not exceed 500 volts.

REFERENCE

 TIS 11-2553 Part 3 Table 11
IEC 60227 Part 3 Table 11
AC Test Voltage : 2.0 kV

NOTE

[illegible]