




CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : CTW - FCVV 600 V (FLEXIBLE CONDUCTOR)

: 600 V 70°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 1/6

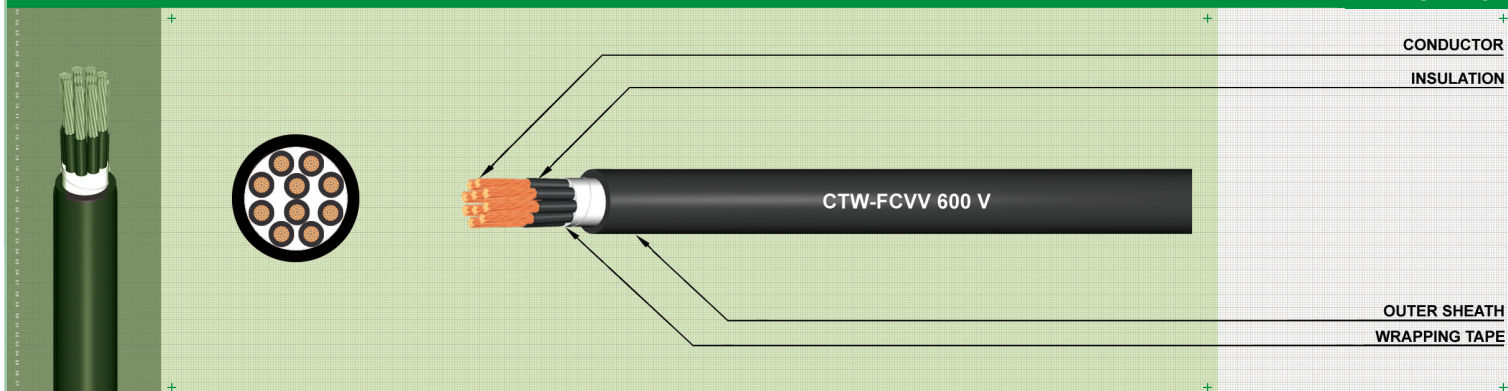

APPLICATION

Supervisory electrical equipment, station control circuits. Out door, suitable installation in the wet or dry cable trenches

CONSTRUCTION

Conductor : Concentric bunching (Flexible) annealed copper conductor.
 Insulation : Polyvinyl chloride (PVC) : Black colour with marking number.
 Filler : PVC Rod and/or Polypropylene (Nonhygroscopic material)
 Wrapping Tape : Polyester (Mylar) tape.
 Outer Sheath : Black polyvinyl chloride (PVC) .
 Other colours to special order.

*** Colours sequence for circuit identification & other colours for outer sheath to special order.

REFERENCE STANDARD

JIS C3401
 *Testing Voltage : 2.0 kV

CLASSIFICATION

Maximum conductor temperature 70°C,
 Circuit voltage does not exceed 600 volts.

OPTIONAL

A Special FR-PVC flame retardant sheath can be supplied.

CTW-FCVV 600V (JIS C3401)		Conductor			Thickness of Insulation	Thickness of Outer Sheath	Overall diameter (Approx.)	Cable weight (Approx.)	Maximum conductor resistance at 20 °C	Minimum insulation resistance at 20 °C	Standard packing
PRODUCT CODE	No. of Core	Nominal Cross-sectional area mm ²	Number and diameter of wire No. / mm	Diameter (Approx.) mm							
CB8026001	2	1	36/0.19	1.35	0.72	1.35	11	87	19.5	50	1,000
CB8026501		1.5	36/0.23	1.65	0.72	1.35	11	100	13.3	50	1,000
CB8026502		2.5	60/0.23	2.15	0.72	1.35	12	128	7.98	50	1,000
CB8026004		4	56/0.29	2.65	0.72	1.35	13	163	4.95	50	1,000
CB8026006		6	84/0.29	3.40	0.9	1.35	15	227	3.3	50	1,000
CB8036001	3	1	36/0.19	1.35	0.72	1.35	11	104	19.5	50	1,000
CB8036501		1.5	36/0.23	1.65	0.72	1.35	12	121	13.3	50	1,000
CB8036502		2.5	60/0.23	2.15	0.72	1.35	13	159	7.98	50	1,000
CB8036004		4	56/0.29	2.65	0.72	1.35	14	209	4.95	50	1,000
CB8036006		6	84/0.29	3.40	0.9	1.35	16	296	3.3	50	1,000
CB8046001	4	1	36/0.19	1.35	0.72	1.35	12	124	19.5	50	1,000
CB8046501		1.5	36/0.23	1.65	0.72	1.35	13	147	13.3	50	1,000
CB8046502		2.5	60/0.23	2.15	0.72	1.35	14	196	7.98	50	1,000
CB8046004		4	56/0.29	2.65	0.72	1.35	15	260	4.95	50	1,000
CB8046006		6	84/0.29	3.40	0.9	1.35	17	372	3.3	50	1,000



CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : **CTW - FCVV 600 V (FLEXIBLE CONDUCTOR)**

: 600 V 70°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 2/6

CTW-FCVV 600V (JIS C3401)		Conductor			Thickness of Insulation	Thickness of Outer Sheath	Overall diameter (Approx.)	Cable weight (Approx.)	Maximum conductor resistance at 20 °C	Minimum insulation resistance at 20 °C	Standard packing
		Nominal Cross-sectional area	Number and diameter of wire	Diameter (Approx.)							
PRODUCT CODE	No. of Core	mm ²	No. / mm	mm	mm	mm	mm	kg/km	Ω/km	MΩ·km	m/R
CB8056001	5	1	36/0.19	1.35	0.72	1.35	13	146	19.5	50	1,000
CB8056501		1.5	36/0.23	1.65	0.72	1.35	14	175	13.3	50	1,000
CB8056502		2.5	60/0.23	2.15	0.72	1.35	15	234	7.98	50	1,000
CB8056004		4	56/0.29	2.65	0.72	1.35	16	314	4.95	50	1,000
CB8056006		6	84/0.29	3.40	0.9	1.35	19	452	3.3	50	1,000
CB8066001	6	1	36/0.19	1.35	0.72	1.35	14	168	19.5	50	1,000
CB8066501		1.5	36/0.23	1.65	0.72	1.35	14	203	13.3	50	1,000
CB8066502		2.5	60/0.23	2.15	0.72	1.35	16	273	7.98	50	1,000
CB8066004		4	56/0.29	2.65	0.72	1.35	17	369	4.95	50	1,000
CB8066006		6	84/0.29	3.40	0.9	1.35	20	534	3.3	50	1,000
CB8076001	7	1	36/0.19	1.35	0.72	1.35	14	182	19.5	50	1,000
CB8076501		1.5	36/0.23	1.65	0.72	1.35	14	220	13.3	50	1,000
CB8076502		2.5	60/0.23	2.15	0.72	1.35	16	299	7.98	50	1,000
CB8076004		4	56/0.29	2.65	0.72	1.35	17	406	4.95	50	1,000
CB8076006		6	84/0.29	3.40	0.9	1.35	20	592	3.3	50	1,000
CB8086001	8	1	36/0.19	1.35	0.72	1.35	14	205	19.5	50	1,000
CB8086501		1.5	36/0.23	1.65	0.72	1.35	15	248	13.3	50	1,000
CB8086502		2.5	60/0.23	2.15	0.72	1.35	17	340	7.98	50	1,000
CB8086004		4	56/0.29	2.65	0.72	1.35	18	464	4.95	50	1,000
CB8086006		6	84/0.29	3.40	0.9	1.35	21	677	3.3	50	1,000
CB8096001	9	1	36/0.19	1.35	0.72	1.35	15	228	19.5	50	1,000
CB8096501		1.5	36/0.23	1.65	0.72	1.35	16	278	13.3	50	1,000
CB8096502		2.5	60/0.23	2.15	0.72	1.35	18	381	7.98	50	1,000
CB8096004		4	56/0.29	2.65	0.72	1.35	20	521	4.95	50	1,000
CB8096006		6	84/0.29	3.40	0.9	1.35	23	763	3.3	50	1,000
CB8106001	10	1	36/0.19	1.35	0.72	1.35	16	257	19.5	50	1,000
CB8106501		1.5	36/0.23	1.65	0.72	1.35	18	312	13.3	50	1,000
CB8106502		2.5	60/0.23	2.15	0.72	1.35	19	429	7.98	50	1,000
CB8106004		4	56/0.29	2.65	0.72	1.35	21	585	4.95	50	1,000
CB8106006		6	84/0.29	3.40	0.9	1.44	25	868	3.3	50	1,000

CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : **CTW - FCVV 600 V (FLEXIBLE CONDUCTOR)**

: 600 V 70°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 3/6

[illegible]



CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : CTW - FCVV 600 V (FLEXIBLE CONDUCTOR)

: 600 V 70°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 4/6

CTW-FCVV 600V (JIS C3401)		Conductor			Thickness of Insulation	Thickness of Outer Sheath	Overall diameter (Approx.)	Cable weight (Approx.)	Maximum conductor resistance at 20 °C	Minimum insulation resistance at 20 °C	Standard packing
		Nominal Cross-sectional area	Number and diameter of wire	Diameter (Approx.)							
PRODUCT CODE	No. of Core	mm ²	No. / mm	mm	mm	mm	mm	kg/km	Ω/km	MΩ·km	m/R
CB8176001	17	1	36/0.19	1.35	0.72	1.35	19	365	19.5	50	1,000
CB8176501		1.5	36/0.23	1.65	0.72	1.35	21	451	13.3	50	1,000
CB8176502		2.5	60/0.23	2.15	0.72	1.35	23	633	7.98	50	1,000
CB8176004		4	56/0.29	2.65	0.72	1.44	25	891	4.95	50	1,000
CB8176006		6	84/0.29	3.40	0.9	1.62	31	1,339	3.3	50	1,000
CB8186001	18	1	36/0.19	1.35	0.72	1.35	19	381	19.5	50	1,000
CB8186501		1.5	36/0.23	1.65	0.72	1.35	21	471	13.3	50	1,000
CB8186502		2.5	60/0.23	2.15	0.72	1.35	23	662	7.98	50	1,000
CB8186004		4	56/0.29	2.65	0.72	1.44	25	935	4.95	50	1,000
CB8186006		6	84/0.29	3.40	0.9	1.62	31	1,406	3.3	50	1,000
CB8196001	19	1	36/0.19	1.35	0.72	1.35	19	396	19.5	50	1,000
CB8196501		1.5	36/0.23	1.65	0.72	1.35	21	491	13.3	50	1,000
CB8196502		2.5	60/0.23	2.15	0.72	1.35	23	692	7.98	50	1,000
CB8196004		4	56/0.29	2.65	0.72	1.44	25	979	4.95	50	1,000
CB8196006		6	84/0.29	3.40	0.9	1.62	31	1,473	3.3	50	1,000
CB8206001	20	1	36/0.19	1.35	0.72	1.35	20	417	19.5	50	1,000
CB8206501		1.5	36/0.23	1.65	0.72	1.35	21	517	13.3	50	1,000
CB8206502		2.5	60/0.23	2.15	0.72	1.35	24	729	7.98	50	1,000
CB8206004		4	56/0.29	2.65	0.72	1.44	26	1,030	4.95	50	1,000
CB8206006		6	84/0.29	3.40	0.9	1.62	33	1,563	3.3	50	1,000
CB8216001	21	1	36/0.19	1.35	0.72	1.35	20	433	19.5	50	1,000
CB8216501		1.5	36/0.23	1.65	0.72	1.35	21	537	13.3	50	1,000
CB8216502		2.5	60/0.23	2.15	0.72	1.35	24	759	7.98	50	1,000
CB8216004		4	56/0.29	2.65	0.72	1.44	26	1,074	4.95	50	1,000
CB8216006		6	84/0.29	3.40	0.9	1.62	33	1,630	3.3	50	1,000
CB8226001	22	1	36/0.19	1.35	0.72	1.35	21	454	19.5	50	1,000
CB8226501		1.5	36/0.23	1.65	0.72	1.35	22	563	13.3	50	1,000
CB8226502		2.5	60/0.23	2.15	0.72	1.35	25	795	7.98	50	1,000
CB8226004		4	56/0.29	2.65	0.72	1.44	28	1,126	4.95	50	1,000
CB8226006		6	84/0.29	3.40	0.9	1.62	34	1,709	3.3	50	1,000

CHAROONG THAI WIRE & CABLE PUBLIC COMPANY LIMITED

CABLE TYPE : **CTW - FCVV 600 V (FLEXIBLE CONDUCTOR)**

: 600 V 70°C PVC INSULATED AND SHEATHED CONTROL CABLE NON-SHIELD

PAGE 5/6

[illegible]

